

PRELIMINARY
SPECIFICATIONS

EDiA EM FB14-20(C)N2(T) Series

ELECTRIC COUNTERBALANCE

1.4 – 2.0 tonnes

INTELLIGENT PERFORMANCE INCREDIBLE PRODUCTIVITY

Smart. Safe. Agile. EDiA EM is a lot of truck in a compact package. Legendary engineering, exceptional ergonomics, and cutting edge technology — like AutoBoost and Sensitive Drive System+ (SDS+) — combine to make EDiA a favourite of drivers and businesses alike.

SPECIFICATIONS

FB14N2T	FB16CN2
FB16CN2T	FB16N2
FB16N2T	FB18CN2
FB18CN2T	FB18N2
FB18N2T	FB20N2
FB20N2T	

WHEN
RELIABILITY IS
EVERYTHING...



Logisnext
Forklifts



EDiA EM

FB14-20(C)N2(T) SERIES

ELECTRIC COUNTERBALANCE

1.4 – 2.0 tonnes



BRAKES

- **Electronic magnetic brakes**
These don't rely on brake pads, eliminating associated maintenance and the risk of brake dust and contamination.
- **Intelligent Cornering System (ICS)**
The truck senses the angle of a turn and reduces speed early for maximum stability and accurate, positive cornering.
- **Automatic parking brake with hill hold**
The truck stops automatically when the accelerator is not engaged, preventing rolling on ramps. No need to remember to use a handle or switch.
- **Energy regen safety lights**
When the truck is regenerating energy the truck slows down faster than usual when the throttle is released. Brake lights blink to warn traffic behind of the increased slow down.

DRIVE

- **AutoBoost**
Acceleration and torque boost functions provide more power when needed, such as on ramps.
- **Sensitive Drive System+ (SDS+)**
Our next-generation driver-assist system for increased safety. Traction and mast performance are independently managed according to steer angle and the velocity of foot and finger controls to match driver reaction speeds.

- **ECO mode**
This mode optimises energy efficiency and gives smoother performance. Ideal for long shifts, training, new users, and part-time users.
- **PRO mode**
This mode maximises performance parameters, giving full control to more experienced operators in intensive situations.
- **Electric differential lock**
When activated, both front wheels spin simultaneously, giving the truck better traction and control in slippery conditions. (Option)

ELECTRICAL AND CONTROL SYSTEMS

- **Integrated Presence System 2 (IPS2)**
Truck and mast will not move if the operator is not seated, and provides a seat belt warning light and parking brake alarm.
- **Straightforward component layout**
Fast, easy access to key areas, reducing downtime and cutting routine servicing bills.
- **Custom settings**
Through the multi-functional configuration software TruckTool, the truck can be fine-tuned by a service engineer to meet any application or scenario.

FORKS AND MAST

- **Adaptive Lift Control (ALC)**
Allows truck to remain stable with fewer movements when lowering loads from high heights.

- **Passive Sway Control (PSC)**
Minimises mast sway, especially in high lifts above 3m.
- **Strong, high-visibility mast**
Free-lift cylinder structure is optimised with hoses over chains for outstanding visibility.
- **High-durability hoses**
Resistant to wear and wide-ranging temperatures — ensuring minimal downtime and disruption.

FRAME AND BODY

- **Bright LED working lights**
Illuminate load and surroundings. Installed in mast structure, but do not light the structure or cabin to minimise reflections and increase visibility.
- **Sideways battery change**
Integrated sliding rollers offer quick and easy battery change for multishift operations. (Option)
- **Safety Zone**
Red lights are projected on the floor to the sides and rear of the truck to give nearby pedestrians a clear idea of the safe distance to keep.

HYDRAULICS

- **Precision tilt and side shift**
This provides easy, fine control — making difficult movements safer and faster.
- **Load sensing hydraulic system**
Load handling functions react similarly to different load weights.



For more information
on EDiA EM please
visit our website



lnf2.eu/ediaem4

EDiA EM

FB40-55(C)N(H) SERIES

ELECTRIC COUNTERBALANCE

4.0 – 5.5 tonnes




OPERATOR COMPARTMENT AND CONTROLS

- F2 button**
 This simple thumb control integrates additional key controls without taking your eyes off the load. Options include clamp release and automatic tilt centring.
- Spacious, open cabin**
 The room means that operators of various sizes can benefit from a range of comfortable driving positions.
- Unparalleled 360° visibility**
 An optimised mast, wheel, dashboard and counterweight design maximises visibility to load, forks, front and rear wheels giving safe, confident operation in tight spaces.
- Optimised pedal position**
 All pedals are in the most ergonomic position, shaped and angled so each pedal will feel familiar to use and easy on the ankles.
- Clear, informative display**
 Full colour and easy to read from all angles, even in direct sunlight. Perfectly positioned for at-a-glance reference, without reducing all-round visibility.
- Highly responsive steering wheel**
 Automatically optimises power to steering for consistently smooth operations — regardless of speed or work intensity – for maximum control, comfort and safety.
- Dual joysticks**
 Dual joysticks offer simultaneous functions for lift and tilt, and settings can be customised to customer requirements. (Option)
- Multifunctional Ergologic Joystick**
 This intuitive and highly ergonomic joystick controls seven different functions, including lifting, lowering, reaching and tilting.
- Long handle bar**
 Aids safer entry/exit.
- Narrow inclined dashboard**
 This enhances the driver's perception of surroundings — giving even greater visibility to the front and sides of the truck.
- Flat floor**
 No obstructions and plenty of room for the operator.
- Extra-large low step**
 Entry and exit is easy and safe, thanks to a high-grip surface.

STEERING SYSTEM

- 360-degree steering**
 The operator can keep the truck in constant motion — saving seconds on every turn. (Option on 3-wheel models)
- Four Wheel Steering (4WS)**
 Front axle drive motors turn in separate directions for better grip and precise handling. The rear axle steers through a full 100°, with dual drive motors for instant, smooth turning on the spot and no initial 'push'. This offers excellent manoeuvrability in tight spaces. (4-wheel models)
- Perfectly weighted steering**
 Optimal steering wheel size with a light but firm feel gives confidence and manoeuvrability at all speeds.
- Mini steering wheel**
 Allows operators to maintain a relaxed driving position and better view, ideal for longer shifts. (Option)

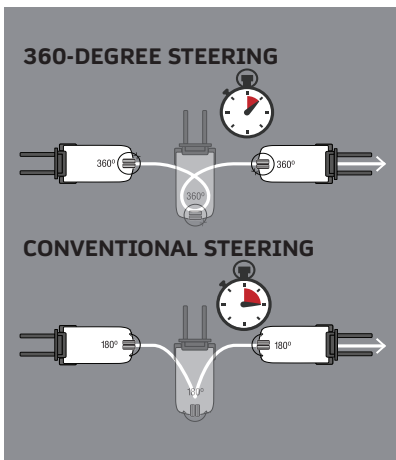

For more information
on EDiA EM please
visit our website



lnf2.eu/ediaem3



EDIA EM

OPTIONAL LI-ION BATTERY SYSTEMS

MAKE YOUR FORKLIFT GO EVEN FURTHER

Lead-acid batteries have been the standard choice for electric lift trucks for decades, and for good reason — they work. But long charging times, demanding maintenance, the need for spare batteries, and the risk of operator misuse can turn day-to-day running into a drag on productivity.

Logisnext Li-ion changes that equation. We don't build one Li-ion battery and apply it to all situations. Whatever your operation looks like, from continuous multi-shift running to lighter, more occasional duty, there's a Logisnext Li-ion battery specified to match it, with a low-maintenance design that all but eliminates the cell damage caused by operator error.

Where a Li-ion option existed before, it typically came from a third-party battery supplier — with its own warranty, its own diagnostics, and its own service relationship running alongside the truck's. Logisnext Li-ion is different: a proprietary Li-ion power unit engineered specifically for Logisnext Forklifts, where the truck, the battery, the onboard battery management system and the charger are run on one diagnostic software, supported by one service technician, and covered by Logisnext warranties.



Li-ion battery option is available in selected regions.

Continuing improvement may lead to changes in these specifications

- **One warranty provider, one service tech**
Truck, battery, onboard battery management system, and charger are covered by a Logisnext warranties and diagnosed through one system — not separate suppliers with separate contracts to chase when something needs attention.
- **Gas-emission free and space-efficient operation**
No off-gassing means no dedicated ventilation or charging room, freeing up floor space you'd otherwise lose to lead-acid infrastructure.
- **Exceptional battery and charger efficiency**
State-of-the-art cell and charger technology delivers up to 30% more power efficiency than lead-acid batteries.
- **Maintenance-free design**
No daily checks, no water refills. Fewer manual touchpoints means less risk of operators damaging cells and shortening battery life.

Fully integrated with Logisnext Forklifts

CANbus communication and automatic ON/OFF synchronisation link battery and truck as one system. Battery level, notifications, and alarms all appear directly on the truck display, giving operators a clear, single point of reference.

- **No spare batteries or charging room needed**
Free up space and cut costs on multi-shift operations, without the extra batteries lead-acid fleets depend on.
- **Quick charge capability**
A 15-minute top-up during breaks or downtime keeps a truck running for longer, improving productivity.
- **Higher sustained voltage**
Consistent lifting and driving performance from the first hour of a shift to the last, with none of the power drop-off of lead-acid.
- **Multiple safety features**
Circuit protection, deep-discharge and overcharge protection, and individual cell temperature and voltage monitoring, all built in as standard.
- **Wide choice of battery and charger capacities.**
Power supply matched to the exact demands of your application, whatever the truck or the shift pattern.

Clean by design



With no emissions and no acid to manage, Logisnext Li-ion batteries suit sensitive environments: food production, packaging, and other spaces where cleanliness isn't optional.

For more information on Li-ion please visit our website



lnf2.eu/lin

VDI - PERFORMANCE & DIMENSIONS

CHARACTERISTICS				Logisnext Forklifts		
1.1	Manufacturer			FB14N2T	FB16CN2T	FB16N2T
1.2	Manufacturer's model designation			Electric	Electric	Electric
1.3	Power source: (battery, diesel, LP gas, petrol)			Seated	Seated	Seated
1.4	Operator type: pedestrian, (operator)-standing, -seated					
1.5	Load capacity	Q	kg	1400	1600	1600
1.6	Load center distance	c	mm	500	500	500
1.8	Load distance, axle to fork face	x	mm	343	343	343
1.9	Wheelbase	y	mm	1320	1320	1428
WEIGHT						
2.1	Truck weight, without load / including battery (simplex mast, lowest lift height)		kg	2790	2966	2949
2.2	Axle loading with maximum load, front / rear (simplex mast, lowest lift height)		kg	3688 / 502	4015 / 551	4020 / 529
2.3	Axle loading without load, front / rear (simplex mast, lowest lift height)		kg	1394 / 1396	1393 / 1573	1476 / 1474
WHEELS, DRIVE TRAIN						
3.1	Tyres: V=solid, L=pneumatic, SE=solid pneumatic - front / rear			SE	SE	SE
3.2	Tyre dimensions, front			18 × 7-8	18 × 7-8	18 × 7-8
3.3	Tyre dimensions, rear			140 / 55-9	140 / 55-9	140 / 55-9
3.5	Number of wheels, front / rear (x=driven)			2 × 2	2 × 2	2 × 2
3.6	Truck width (center of tyres), front	b10	mm	930	930	930
3.7	Truck width (center of tyres), rear	b11	mm	174	174	174
DIMENSIONS						
4.1	Mast tilt, forwards / backwards	α/β	°	5 / 7.5	5 / 7.5	5 / 7.5
4.2	Height with mast lowered (see tables)	h1	mm	2125	2125	2125
4.3	Free lift (see tables)	h2	mm	80	80	80
4.4	Lift height (see tables)	h3	mm	3290	3290	3290
4.5	Overall height with mast raised	h4	mm	4335	4335	4335
4.7	Height to top of overhead guard	h6	mm	2050	2050	2050
4.8	Seat height	h7	mm	1035	1035	1035
4.12	Tow coupling height	h10	mm	540	540	540
4.19	Overall length	l1	mm	2996	2996	3104
4.20	Length to fork face (includes fork thickness)	l2	mm	1846	1846	1954
4.21	Overall width	b1/b2	mm	1090	1090	1090
4.22	Fork dimensions (thickness, width, length)	s / e / l	mm	35 × 100 × 1150	35 × 100 × 1150	35 × 100 × 1150
4.23	Fork carriage to DIN 15 173 A/B/no			2A	2A	2A
4.24	Fork carriage width	b3	mm	920	920	920
4.31	Ground clearance under mast, with load	m1	mm	95	95	95
4.32	Ground clearance at center of wheelbase, with load (forks lowered)	m2	mm	95	95	95
4.33	Working aisle width with 1000 × 1200 mm pallets, crosswise	Ast	mm	3173	3173	3281
4.34a	Working aisle width with 800 × 1200 mm pallets, lengthwise	Ast	mm	3296	3296	3404
4.35	Turning circle radius	Wa	mm	1502	1502	1610
4.36	Minimum distance between centers of rotation	b13	mm	0	0	0
PERFORMANCE						
5.1	Travel speed, with / without load		km/h	16 / 16	16 / 16	16 / 16
5.2	Lifting speed, with / without load		m/s	0.55 / 0.62	0.52 / 0.62	0.52 / 0.62
5.3	Lowering speed, with / without load		m/s	0.56 / 0.56	0.56 / 0.56	0.56 / 0.56
5.5	Rated drawbar pull, with / without load		N	4900 / 5200	4900 / 5200	4900 / 5200
5.6	Maximum drawbar pull, with / without load (5 min short duty)		N	15000 / 15300	14900 / 15200	14900 / 15200
5.7	Gradeability, with / without load		%	16 / 26	15 / 25	15 / 25
5.8	Maximum gradeability, with / without load		%	27 / 35	27 / 35	27 / 35
5.9	Acceleration time (10 metres) with / without load		s	4.0 / 3.8	4.1 / 3.8	4.1 / 3.8
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)			Electric	Electric	Electric
ELECTRIC MOTORS						
6.1	Drive motor capacity (60 min. short duty)		kW	2 × 5.5	2 × 5.5	2 × 5.5
6.2	Lift motor output at 15% duty factor		kW	10	10	10
6.3	Battery to DIN 43 531 / 35 / 36 A/B/C/no			DIN 43531 A/no	DIN 43531 A/no	DIN 43531 A/no
6.4	Battery voltage/capacity at 5-hour discharge		V/Ah	500-625	500-625	625-750
6.5	Battery weight		kg	679	679	812
6.6a	Energy consumption according to EN 16796		kWh/h	3.7	3.9	3.9
MISCELLANEOUS						
8.1	Type of drive control			AC	AC	AC
10.1	Maximum operating pressure for attachments		bar	210	210	210
10.2	Oil flow for attachments		l/min	30	30	30
10.7	Noise level, value at operator's ear (EN 12053)		dB(A)	65	65	65
10.8	Towing coupling design / DIN type, ref.			DIN15170-H	DIN15170-H	DIN15170-H

EDIA EM

FB14 - 20(C)N2T SERIES

ELECTRIC COUNTERBALANCE

3 wheel models
1.4 - 2.0 tonnes



VDI - PERFORMANCE & DIMENSIONS

CHARACTERISTICS				Logisnext Forklifts		
1.1	Manufacturer			FB18CN2T	FB18N2T	FB20N2T
1.2	Manufacturer's model designation			Electric	Electric	Electric
1.3	Power source: (battery, diesel, LP gas, petrol)			Seated	Seated	Seated
1.4	Operator type: pedestrian, (operator)-standing, -seated					
1.5	Load capacity	Q	kg	1800	1800	2000
1.6	Load center distance	c	mm	500	500	500
1.8	Load distance, axle to fork face	x	mm	343	343	358
1.9	Wheelbase	y	mm	1320	1428	1428
WEIGHT						
2.1	Truck weight, without load / including battery (simplex mast, lowest lift height)		kg	3156	3119	3342
2.2	Axle loading with maximum load, front / rear (simplex mast, lowest lift height)		kg	4351 / 605	4333 / 586	4711 / 631
2.3	Axle loading without load, front / rear (simplex mast, lowest lift height)		kg	1401 / 1754	1471 / 1649	1509 / 1833
WHEELS, DRIVE TRAIN						
3.1	Tyres: V=solid, L=pneumatic, SE=solid pneumatic - front / rear			SE	SE	SE
3.2	Tyre dimensions, front			18 × 7-8	18 × 7-8	200 / 50-10
3.3	Tyre dimensions, rear			140 / 55-9	140 / 55-9	140 / 55-9
3.5	Number of wheels, front / rear (x=driven)			2 × 2	2 × 2	2 × 2
3.6	Truck width (center of tyres), front	b10	mm	930	930	938
3.7	Truck width (center of tyres), rear	b11	mm	174	174	174
DIMENSIONS						
4.1	Mast tilt, forwards / backwards	α/β	°	5 / 7.5	5 / 7.5	5 / 7.5
4.2	Height with mast lowered (see tables)	h1	mm	2125	2125	2125
4.3	Free lift (see tables)	h2	mm	80	80	80
4.4	Lift height (see tables)	h3	mm	3290	3290	3290
4.5	Overall height with mast raised	h4	mm	4335	4335	4335
4.7	Height to top of overhead guard	h6	mm	2050	2050	2050
4.8	Seat height	h7	mm	1035	1035	1035
4.12	Tow coupling height	h10	mm	540	540	540
4.19	Overall length	l1	mm	2996	3104	3119
4.20	Length to fork face (includes fork thickness)	l2	mm	1846	1954	1969
4.21	Overall width	b1/b2	mm	1090	1090	1140
4.22	Fork dimensions (thickness, width, length)	s / e / l	mm	35 × 100 × 1150	35 × 100 × 1150	35 × 100 × 1150
4.23	Fork carriage to DIN 15 173 A/B/no			2A	2A	2A
4.24	Fork carriage width	b3	mm	920	920	920
4.31	Ground clearance under mast, with load	m1	mm	95	95	95
4.32	Ground clearance at center of wheelbase, with load (forks lowered)	m2	mm	95	95	95
4.33	Working aisle width with 1000 × 1200 mm pallets, crosswise	Ast	mm	3173	3281	3295
4.34a	Working aisle width with 800 × 1200 mm pallets, lengthwise	Ast	mm	3296	3404	3419
4.35	Turning circle radius	Wa	mm	1502	1610	1610
4.36	Minimum distance between centers of rotation	b13	mm	0	0	0
PERFORMANCE						
5.1	Travel speed, with / without load		km/h	16 / 16	16 / 16	16 / 16
5.2	Lifting speed, with / without load		m/s	0.46 / 0.62	0.46 / 0.62	0.42 / 0.62
5.3	Lowering speed, with / without load		m/s	0.56 / 0.56	0.56 / 0.56	0.56 / 0.56
5.5	Rated drawbar pull, with / without load		N	4800 / 5100	4800 / 5100	4700 / 5100
5.6	Maximum drawbar pull, with / without load (5 min short duty)		N	14900 / 15200	14900 / 15200	14800 / 15200
5.7	Gradeability, with / without load		%	13 / 23	13 / 23	12 / 21
5.8	Maximum gradeability, with / without load		%	26 / 35	26 / 35	24 / 35
5.9	Acceleration time (10 metres) with / without load		s	4.2 / 3.8	4.2 / 3.8	4.3 / 3.9
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)			Electric	Electric	Electric
ELECTRIC MOTORS						
6.1	Drive motor capacity (60 min. short duty)		kW	2 × 5.5	2 × 5.5	2 × 5.5
6.2	Lift motor output at 15% duty factor		kW	10	10	10
6.3	Battery to DIN 43 531 / 35 / 36 A/B/C/no			DIN 43531 A/no	DIN 43531 A/no	DIN 43531 A/no
6.4	Battery voltage/capacity at 5-hour discharge		V/Ah	500-625	625-750	625-750
6.5	Battery weight		kg	679	812	812
6.6a	Energy consumption according to EN 16796		kWh/h	4.2	4.2	4.5
MISCELLANEOUS						
8.1	Type of drive control			AC	AC	AC
10.1	Maximum operating pressure for attachments		bar	210	210	210
10.2	Oil flow for attachments		l/min	30	30	30
10.7	Noise level, value at operator's ear (EN 12053)		dB(A)	65	65	65
10.8	Towing coupling design / DIN type, ref.			DIN15170-H	DIN15170-H	DIN15170-H

EDIA EM

FB14 - 20(C)N2T SERIES

ELECTRIC COUNTERBALANCE

3 wheel models
1.4 - 2.0 tonnes



MAST PERFORMANCE AND CAPACITY

EDIA EM

FB14 - 20(C)N2T SERIES

3 wheel models





Mast Type	FB14-20(C)N2T					FB14N2T	FB16CN2T	FB18CN2T	FB16N2T	FB18N2T	FB20N2T	
	h3 mm	h1 mm	h4 mm	h2 / h5 mm	tilt angle fwd / rew degrees std cabin	Q@ c=500 mm kg	Q@ c=500 mm kg	Q@ c=500 mm kg	Q@ c=500 mm kg	Q@ c=500 mm kg	Q@ c=500 mm kg	
Simplex	2000**	1480*	3045	80	5 / 6	N.A.	1400	1600	1800	1600	1800	2000
	2560**	1760*	3605	80	5 / 6	5 / 5	1400	1600	1800	1600	1800	2000
	2760**	1860*	3805	80	5 / 7.5	5 / 6	1400	1600	1800	1600	1800	2000
	3000	1980*	4045	80	5 / 7.5	5 / 6	1400	1600	1800	1600	1800	2000
	3290	2125	4335	80	5 / 7.5	5 / 7.5	1400	1600	1800	1600	1800	2000
	3530**	2245	4575	80	5 / 7.5	5 / 7.5	1400	1600	1800	1600	1800	2000
	3720	2385	4765	80	5 / 7.5	5 / 7.5	1400	1600	1800	1600	1800	2000
	4090	2570	5135	80	5 / 7.5	5 / 7.5	1400	1600	1800	1600	1800	2000
	4480	2775	5525	80	5 / 5	5 / 5	1350	1550	1750	1575	1775	2000
	5000	3035	6045	80	5 / 5	5 / 5	1300	1475	1675	1525	1700	1925
	5500	3285	6545	80	5 / 3.5	5 / 3.5	1250	1425	1600	1475	1650	1850
6000	3535	7045	80	5 / 3.5	5 / 3.5	1200	1375	1450	1425	1500	1775	
Duplex	2800**	1880*	3845	835	5 / 6	5 / 6	1400	1600	1800	1600	1800	2000
	3000	1980*	4045	935	5 / 6	5 / 6	1400	1600	1800	1600	1800	2000
	3295	2125	4340	1080	5 / 6	5 / 6	1400	1600	1800	1600	1800	2000
	3515**	2245	4560	1200	5 / 6	5 / 6	1400	1600	1800	1600	1800	2000
	3700	2385	4745	1340	5 / 6	5 / 6	1400	1600	1800	1600	1800	2000
Triplex	4030	2570	5075	1525	5 / 6	5 / 6	1350	1550	1750	1575	1775	2000
	3710	1780*	4755	735	5 / 6	5 / 3.5	1400	1600	1800	1600	1800	2000
	4010	1880*	5055	835	5 / 6	5 / 3.5	1400	1600	1800	1600	1800	2000
	4310	1980*	5355	935	5 / 6	5 / 5	1350	1600	1750	1600	1800	2000
	4750	2125	5795	1080	5 / 6	5 / 5	1300	1600	1700	1550	1800	2000
	5090	2245	6135	1200	5 / 3.5	5 / 3.5	1275	1450	1650	1550	1750	1925
	5490	2385	6535	1340	5 / 3.5	5 / 3.5	1225	1400	1650	1500	1700	1900
	5990	2570	7035	1525	5 / 3.5	5 / 3.5	1175	1350	1600	1400	1600	1750
	6490	2830	7535	1785	5 / 3.5	5 / 3.5	1125	1350	1350	1350	1400	1650
	7000	3035	8045	1990	5 / 3.5	5 / 3.5	1100	1100	1100	1100	1100	1350


* Lower than overhead guard **CSM

BATTERY DIMENSIONS		14N2T	16CN2T	18CN2T	16N2T	18N2T	20N2T
Battery voltage	V	48	48	48	48	48	48
Capacity at a 5-hour discharge	Ah	500 / 625	500 / 625	500 / 625	625 / 750	625 / 750	625 / 750
Battery weight, Min.	kg	679 / 812	679 / 812	679 / 812	812 / 900	812 / 900	812 / 900
Battery weight, Max.	kg	1000 / 1000	1000 / 1000	1000 / 1000	1160 / 1160	1160 / 1160	1160 / 1160
BATTERY BOX DIMENSIONS							
Length	mm	522	522	522	630	630	630
Width	mm	830 / 1006	830 / 1006	830 / 1006	830 / 1006	830 / 1006	830 / 1006
Height	mm	627	627	627	627	627	627
BATTERY COMPARTMENT SIZE							
Length	mm	532	532	532	640	640	640
Width	mm	850 / 1018	850 / 1018	850 / 1018	850 / 1018	850 / 1018	850 / 1018
Height	mm	690 (660*)	690 (660*)	690 (660*)	690 (660*)	690 (660*)	690 (660*)

*With battery exchange rolls

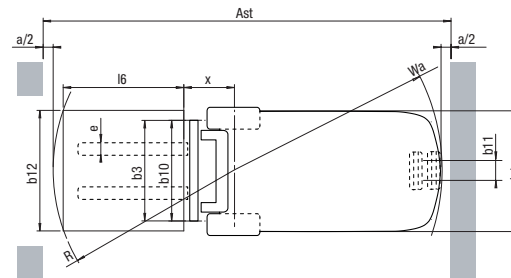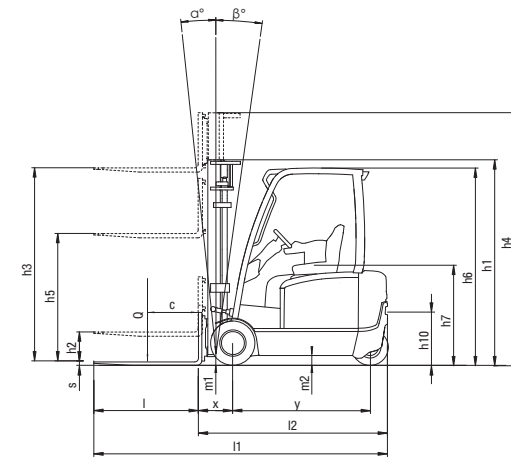

- Ast = $Wa + R + a$
- Ast = Working aisle width
- Wa = Turning radius
- a = Safety clearance = $2 \times 100 \text{ mm}$
- R = $\sqrt{(l6 + x)^2 + (b12 / 2)^2}$
- b12 = Pallet width (1200 mm)
- h1 = Height with mast lowered
- h2 = Standard free lift
- h3 = Lift height
- h4 = Height with mast raised
- h5 = Full free lift
- Q = Lifting capacity, rated load
- c = Load centre (distance)

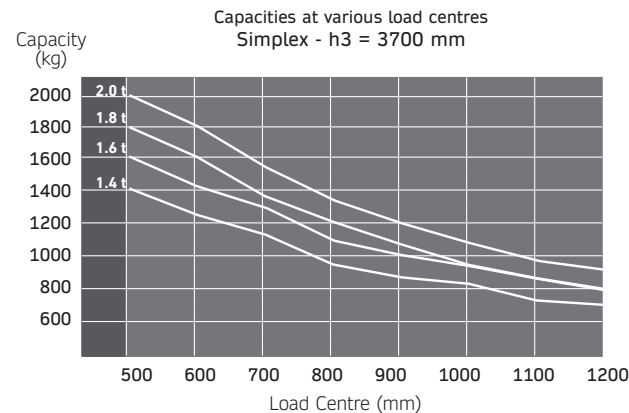

VDI - PERFORMANCE & DIMENSIONS

CHARACTERISTICS				Logisnext Forklifts				
1.1	Manufacturer			FB16CN2	FB16N2	FB18CN2	FB18N2	FB20N2
1.2	Manufacturer's model designation			Electric	Electric	Electric	Electric	Electric
1.3	Power source: (battery, diesel, LP gas, petrol)			Seated	Seated	Seated	Seated	Seated
1.4	Operator type: pedestrian, (operator)-standing, -seated							
1.5	Load capacity	Q	kg	1600	1600	1800	1800	2000
1.6	Load center distance	c	mm	500	500	500	500	500
1.8	Load distance, axle to fork face	x	mm	343	343	343	343	358
1.9	Wheelbase	y	mm	1394	1502	1394	1502	1502
WEIGHT								
2.1	Truck weight, without load / including battery (simplex mast, lowest lift height)		kg	2944	2957	3114	3097	3287
2.2	Axle loading with maximum load, front / rear (simplex mast, lowest lift height)		kg	3990 / 554	4008 / 550	4311 / 603	4295 / 603	4668 / 620
2.3	Axle loading without load, front / rear (simplex mast, lowest lift height)		kg	1422 / 1522	1510 / 1448	1422 / 1692	1484 / 1613	1525 / 1762
WHEELS, DRIVE TRAIN								
3.1	Tyres: V=solid, L=pneumatic, SE=solid pneumatic - front / rear			SE	SE	SE	SE	SE
3.2	Tyre dimensions, front			18 × 7-8	18 × 7-8	18 × 7-8	18 × 7-8	200 / 50-10
3.3	Tyre dimensions, rear			16 × 6-8	16 × 6-8	16 × 6-8	16 × 6-8	16×6-8
3.5	Number of wheels, front / rear (x=driven)			2 × / 2	2 × / 2	2 × / 2	2 × / 2	2 × / 2
3.6	Truck width (center of tyres), front	b10	mm	930	930	930	930	938
3.7	Truck width (center of tyres), rear	b11	mm	898	898	898	898	898
DIMENSIONS								
4.1	Mast tilt, forwards / backwards	α/β	°	5 / 7.5	5/7.5	5/7.5	5/7.5	5/7.5
4.2	Height with mast lowered (see tables)	h1	mm	2125	2125	2125	2125	2125
4.3	Free lift (see tables)	h2	mm	80	80	80	80	80
4.4	Lift height (see tables)	h3	mm	3290	3290	3290	3290	3290
4.5	Overall height with mast raised	h4	mm	4335	4335	4335	4335	4335
4.7	Height to top of overhead guard	h6	mm	2050	2050	2050	2050	2050
4.8	Seat height	h7	mm	1035	1035	1035	1035	1035
4.12	Tow coupling height	h10	mm	520	520	520	520	520
4.19	Overall length	l1	mm	3152	3260	3152	3260	3275
4.20	Length to fork face (includes fork thickness)	l2	mm	2002	2110	2002	2110	2125
4.21	Overall width	b1/b2	mm	1090	1090	1090	1090	1140
4.22	Fork dimensions (thickness, width, length)	s / e / l	mm	35 × 100 × 1150	35 × 100 × 1150	35 × 100 × 1150	35 × 100 × 1150	35 × 100 × 1150
4.23	Fork carriage to DIN 15 173 A/B/no			2A	2A	2A	2A	2A
4.24	Fork carriage width	b3	mm	920	920	920	920	920
4.31	Ground clearance under mast, with load	m1	mm	95	95	95	95	95
4.32	Ground clearance at center of wheelbase, with load (forks lowered)	m2	mm	95	95	95	95	95
4.33	Working aisle width with 1000 × 1200 mm pallets, crosswise	Ast	mm	3333	3441	3333	3441	3455
4.34a	Working aisle width with 800 × 1200 mm pallets, lengthwise	Ast	mm	3456	3564	3456	3564	3579
4.35	Turning circle radius	Wa	mm	1662	1770	1662	1770	1770
4.36	Minimum distance between centers of rotation	b13	mm	0	0	0	0	0
PERFORMANCE								
5.1	Travel speed, with / without load		km/h	17 / 17	17 / 17	17 / 17	17 / 17	17 / 17
5.2	Lifting speed, with / without load		m/s	0.52 / 0.62	0.52 / 0.62	0.46 / 0.62	0.46 / 0.62	0.42 / 0.62
5.3	Lowering speed, with / without load		m/s	0.56 / 0.56	0.56 / 0.56	0.56 / 0.56	0.56 / 0.56	0.56 / 0.56
5.5	Rated drawbar pull, with / without load		N	4900 / 5200	4900 / 5200	4800 / 5100	4800 / 5100	4700 / 5100
5.6	Maximum drawbar pull, with / without load (5 min short duty)		N	14900 / 15200	15000 / 15300	14900 / 15200	14900 / 15200	14800 / 15200
5.7	Gradeability, with / without load		%	15 / 25	15 / 26	14 / 23	14 / 23	12 / 21
5.8	Maximum gradeability, with / without load		%	27 / 35	27 / 35	26 / 35	26 / 35	24 / 35
5.9	Acceleration time (10 metres) with / without load		s	4.1 / 3.8	4.0 / 3.8	4.2 / 3.8	4.2 / 3.8	3.9 / 4.4
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)			Electric	Electric	Electric	Electric	Electric
ELECTRIC MOTORS								
6.1	Drive motor capacity (60 min. short duty)		kW	2 × 5.5	2 × 5.5	2 × 5.5	2×5.5	2×5.5
6.2	Lift motor output at 15% duty factor		kW	10	10	10	10	10
6.3	Battery to DIN 43 531 / 35 / 36 A/B/C/no			DIN 43531 A/no	DIN 43531 A/no	DIN 43531 A/no	DIN 43531 A/no	DIN 43531 A/no
6.4	Battery voltage/capacity at 5-hour discharge		V/Ah	500-625	625-750	500-625	625-750	625-750
6.5	Battery weight		kg	679	679	679	812	812
6.6a	Energy consumption according to EN 16796		kWh/h	3.9	3.9	4.2	4.2	4.5
MISCELLANEOUS								
8.1	Type of drive control			AC	AC	AC	AC	AC
10.1	Maximum operating pressure for attachments		bar	210	210	210	210	210
10.2	Oil flow for attachments		l/min	30	30	30	30	30
10.7	Noise level, value at operator's ear (EN 12053)		dB(A)	65	65	65	65	65
10.8	Towing coupling design / DIN type, ref.			DIN15170-H	DIN15170-H	DIN15170-H	DIN15170-H	DIN15170-H

EDIA EM

**FB16 - 20(C)N2
SERIES**

**ELECTRIC
COUNTERBALANCE**

4 wheel models

1.6 - 2.0 tonnes



MAST PERFORMANCE AND CAPACITY

EDIA EM

FB16 - 20(C)N2 SERIES 4 WHEEL MODELS





Mast Type	FB16-20(C)N2						FB16CN2	FB18CN2	FB16N2	FB18N2	FB20N2
	h3 mm	h1 mm	h4 mm	h2 / h5 mm	tilt angle fwd / rew degrees std cabin		Q@ c=500 mm kg	Q@ c=500 mm kg	Q@ c=500 mm kg	Q@ c=500 mm kg	Q@ c=500 mm kg
Simplex	2000**	1480*	3045	80	5 / 6	N.A.	1600	1800	1600	1800	2000
	2560**	1760*	3605	80	5 / 6	5 / 5	1600	1800	1600	1800	2000
	2760**	1860*	3805	80	5 / 7.5	5 / 6	1600	1800	1600	1800	2000
	3000	1980*	4045	80	5 / 7.5	5 / 6	1600	1800	1600	1800	2000
	3290	2125	4335	80	5 / 7.5	5 / 7.5	1600	1800	1600	1800	2000
	3530**	2245	4575	80	5 / 7.5	5 / 7.5	1600	1800	1600	1800	2000
	3720	2385	4765	80	5 / 7.5	5 / 7.5	1600	1800	1600	1800	2000
	4090	2570	5135	80	5 / 7.5	5 / 7.5	1600	1800	1600	1800	2000
	4480	2775	5525	80	5 / 5	5 / 5	1600	1800	1600	1800	2000
	5000	3035	6045	80	5 / 5	5 / 5	1525	1725	1600	1775	1950
	5500	3285	6545	80	5 / 3.5	5 / 3.5	1475	1650	1550	1725	1875
Duplex	6000	3535	7045	80	5 / 3.5	5 / 3.5	1225	1225	1500	1500	1825
	2800**	1880*	3845	835	5 / 6	5 / 6	1600	1800	1600	1800	2000
	3000	1980*	4045	935	5 / 6	5 / 6	1600	1800	1600	1800	2000
	3295	2125	4340	1080	5 / 6	5 / 6	1600	1800	1600	1800	2000
	3515**	2245	4560	1200	5 / 6	5 / 6	1600	1800	1600	1800	2000
	3700	2385	4745	1340	5 / 6	5 / 6	1600	1800	1600	1800	2000
Triplex	4030	2570	5075	1525	5 / 6	5 / 6	1600	1800	1600	1800	2000
	3710	1780*	4755	735	5 / 6	5 / 3.5	1600	1800	1600	1800	2000
	4010	1880*	5055	835	5 / 6	5 / 3.5	1600	1800	1600	1800	2000
	4310	1980*	5355	935	5 / 6	5 / 5	1600	1800	1600	1800	2000
	4750	2125	5795	1080	5 / 6	5 / 5	1600	1750	1600	1800	2000
	5090	2245	6135	1200	5 / 3.5	5 / 3.5	1550	1700	1600	1750	1925
	5490	2385	6535	1340	5 / 3.5	5 / 3.5	1500	1600	1550	1700	1900
	5990	2570	7035	1525	5 / 3.5	5 / 3.5	1400	1600	1450	1625	1800
	6490	2830	7535	1785	5 / 3.5	5 / 3.5	1350	1400	1400	1400	1600
	7000	3035	8045	1990	5 / 3.5	5 / 3.5	1100	1100	1100	1100	1300


* Lower than overhead guard **CSM

BATTERY DIMENSIONS		16CN2	18CN2	16N2	18N2	20N2
Battery voltage	V	48	48	48	48	48
Capacity at a 5-hour discharge	Ah	500 / 625	500 / 625	625 / 750	625 / 750	625 / 750
Battery weight, Min.	kg	679 / 812	679 / 812	812 / 900	812 / 900	812 / 900
Battery weight, Max.	kg	1000 / 1000	1000 / 1000	1160 / 1160	1160 / 1160	1160 / 1160
BATTERY BOX DIMENSIONS						
Length	mm	522	522	630	630	630
Width	mm	830 / 1006	830 / 1006	830 / 1006	830 / 1006	830 / 1006
Height	mm	627	627	627	627	627
BATTERY COMPARTMENT SIZE						
Length	mm	532	532	640	640	640
Width	mm	850 / 1018	850 / 1018	850 / 1018	850 / 1018	850 / 1018
Height	mm	690 (660*)	690 (660*)	690 (660*)	690 (660*)	690 (660*)

*With battery exchange rolls

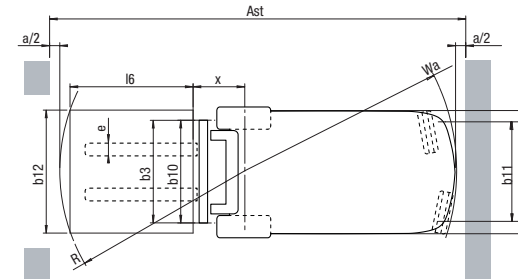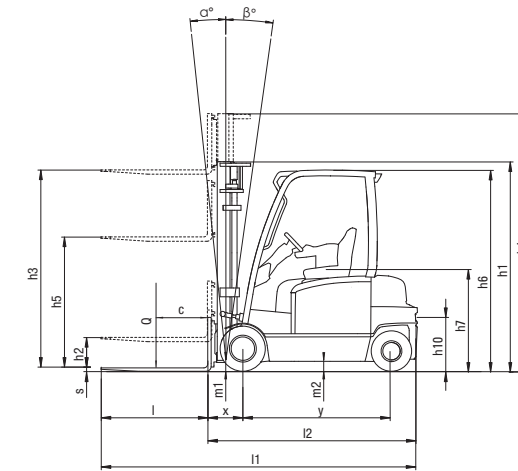

- Ast = $Wa + R + a$
- Ast = Working aisle width
- Wa = Turning radius
- a = Safety clearance = $2 \times 100 \text{ mm}$
- R = $\sqrt{(l6 + x)^2 + (b12 / 2 - b13)^2}$
- b12 = Pallet width (1200 mm)
- h1 = Height with mast lowered
- h2 = Standard free lift
- h3 = Lift height
- h4 = Height with mast raised
- h5 = Full free lift
- Q = Lifting capacity, rated load
- c = Load centre (distance)

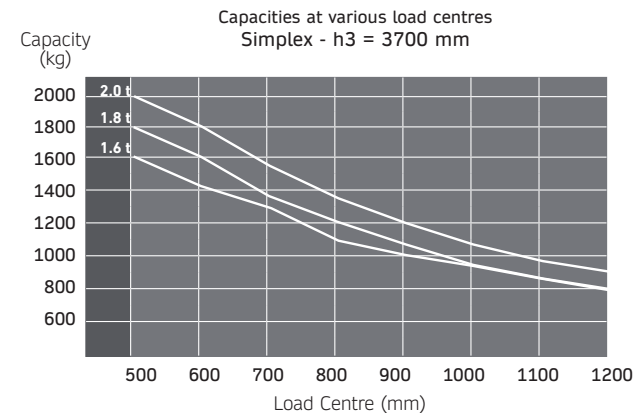

STANDARD EQUIPMENT & OPTIONS

● = Standard
■ = Option

	FB14N2T	FB16CN2T	FB18CN2T	FB16N2T	FB18N2T	FB20N2T	FB16CN2	FB18CN2	FB16N2	FB18N2	FB20N2
GENERAL						3 WHEEL MODELS					
3- and 4- Wheel chassis, 48 Volts, front wheel drive	●	●	●	●	●	●	●	●	●	●	●
Operator selectable economy or high performance modes ECO/PRO	●	●	●	●	●	●	●	●	●	●	●
Multifunctional colour display (hourmeter, BDI etc.)	●	●	●	●	●	●	●	●	●	●	●
Lift tilt interlock and hydraulic and drive interlock / PDS	●	●	●	●	●	●	●	●	●	●	●
Tiltable steering column	●	●	●	●	●	●	●	●	●	●	●
Full electrical brakes	●	●	●	●	●	●	●	●	●	●	●
Battery compartment side door and opening battery hood cover	●	●	●	●	●	●	●	●	●	●	●
SST (Seat Switch Timeout: all functions are disabled – truck enters 'stop mode' and park brake is automatically applied)	●	●	●	●	●	●	●	●	●	●	●
Basic overhead guard	●	●	●	●	●	●	●	●	●	●	●
Trucktool setup and diagnostics	●	●	●	●	●	●	●	●	●	●	●
Dual joysticks	■	■	■	■	■	■	■	■	■	■	■
Mini steering wheel	■	■	■	■	■	■	■	■	■	■	■
Ergologic Joystick	■	■	■	■	■	■	■	■	■	■	■
Rapid sideway battery exchange chassis (SWE)	■	■	■	■	■	■	■	■	■	■	■
Chassis-integrated roller bed (for battery SWE)	■	■	■	■	■	■	■	■	■	■	■
Special (RAL) colour for frame	■	■	■	■	■	■	■	■	■	■	■
POWER SOURCE						4 WHEEL MODELS					
Li-Ion battery*	■	■	■	■	■	■	■	■	■	■	■
Lead-acid battery	■	■	■	■	■	■	■	■	■	■	■
HYDRAULIC						3 WHEEL MODELS					
3 valve hydraulic fingertip control mounted on adjustable armrest	●	●	●	●	●	●	●	●	●	●	●
4th & 5th hydraulic options	■	■	■	■	■	■	■	■	■	■	■
Manual lever hydraulic control	■	■	■	■	■	■	■	■	■	■	■
Hydraulic accumulator for smoother load handling on rough surface	■	■	■	■	■	■	■	■	■	■	■
Low Noise Lift	■	■	■	■	■	■	■	■	■	■	■
MAST, FORKS AND CARRIAGE						4 WHEEL MODELS					
Load Backrest	●	●	●	●	●	●	●	●	●	●	●
Passive sway control for mast at high lifts	●	●	●	●	●	●	●	●	●	●	●
Simplex, Duplex or Triplex masts, from 3m to 7m	■	■	■	■	■	■	■	■	■	■	■
Forks 900mm - 2000mm	■	■	■	■	■	■	■	■	■	■	■
Sideshifter W920mm	■	■	■	■	■	■	■	■	■	■	■
Integrated Sideshifter W920mm	■	■	■	■	■	■	■	■	■	■	■
Integrated Fork Positioner with sideshift	■	■	■	■	■	■	■	■	■	■	■
Load weight indicator, in 50kg increments	■	■	■	■	■	■	■	■	■	■	■
Performance reduction from 2m to 3.5m mast (above standard)	■	■	■	■	■	■	■	■	■	■	■
DRIVE AND LIFT CONTROLS						4 WHEEL MODELS					
Variable speed control on all hydraulic functions	●	●	●	●	●	●	●	●	●	●	●
Curve control	●	●	●	●	●	●	●	●	●	●	●
Armrest direction control	●	●	●	●	●	●	●	●	●	●	●
Electronic differential lock	■	■	■	■	■	■	■	■	■	■	■
Automatic tilt centering via the F2 button on fingertip controller	■	■	■	■	■	■	■	■	■	■	■
Tilt centering second function. Two pcs. of angle memories	■	■	■	■	■	■	■	■	■	■	■
Forward-reverse direction selection lever on steering column	■	■	■	■	■	■	■	■	■	■	■
Dual pedal system - forward and reverse	■	■	■	■	■	■	■	■	■	■	■
Operator presence pedal	■	■	■	■	■	■	■	■	■	■	■

* Li-ion battery option is available in selected regions.

EDIA^{EM} FB14-20(C)N2(T) SERIES ELECTRIC COUNTERBALANCE

1.4 – 2.0 tonnes



Multifunctional colour display (hourmeter, BDI etc.)



Dual pedal system - forward and reverse. (Option)



Manual lever hydraulic control. (Option)

STANDARD EQUIPMENT & OPTIONS

● = Standard
■ = Option

	FB14N2T	FB16CN2T	FB18CN2T	FB16N2T	FB18N2T	FB20N2T	FB16CN2	FB18CN2	FB16N2	FB18N2	FB20N2
ELECTRIC	3 WHEEL MODELS					4 WHEEL MODELS					
LED working lights, 2 front and 1 rear	●	●	●	●	●	●	●	●	●	●	●
Automated reversing light	●	●	●	●	●	●	●	●	●	●	●
Automatic light switch	●	●	●	●	●	●	●	●	●	●	●
Amber strobe light	●	●	●	●	●	●	●	●	●	●	●
Road light kit	●	●	●	●	●	●	●	●	●	●	●
Electronic back-up smart alarm	●	●	●	●	●	●	●	●	●	●	●
"Blue Point" safety light, located rear and/or front	●	●	●	●	●	●	●	●	●	●	●
Red line safety lights, located on the sides	●	●	●	●	●	●	●	●	●	●	●
Pin code access	●	●	●	●	●	●	●	●	●	●	●
5V USB connector output 2x 2.5A (max. 4.4A)	●	●	●	●	●	●	●	●	●	●	●
240W, 12V Power supply for accessories	●	●	●	●	●	●	●	●	●	●	●
OHG AND CABIN											
Grammer MSG65 vinyl with seat belt switch	●	●	●	●	●	●	●	●	●	●	●
Grammer MSG65 or MSG75 with options vinyl / cloth / heater / backrest extension / Armrest (MSG65)	●	●	●	●	●	●	●	●	●	●	●
Swivel seat	●	●	●	●	●	●	●	●	●	●	●
Plexi roof cover	●	●	●	●	●	●	●	●	●	●	●
Panel cabin: Front screen with wiper + roof with crane opening	●	●	●	●	●	●	●	●	●	●	●
Panel cabin: Economy. Front screen without wiper, plexi roof cover	●	●	●	●	●	●	●	●	●	●	●
Panel cabin steel doors	●	●	●	●	●	●	●	●	●	●	●
Panel cabin rear screen	●	●	●	●	●	●	●	●	●	●	●
PVC doors	●	●	●	●	●	●	●	●	●	●	●
Heater for cabin	●	●	●	●	●	●	●	●	●	●	●
Interior package, including radio with speakers, roof lining, reading light.	●	●	●	●	●	●	●	●	●	●	●
Deluxe cabin, including wind screen with wiper, roof, steel doors, heater and interior lining.	●	●	●	●	●	●	●	●	●	●	●
Rear view mirror, Basic / Outside / Wide view	●	●	●	●	●	●	●	●	●	●	●
List bracket - A4	●	●	●	●	●	●	●	●	●	●	●
Storage plastic locker	●	●	●	●	●	●	●	●	●	●	●
Sun visor	●	●	●	●	●	●	●	●	●	●	●
Accessory rack	●	●	●	●	●	●	●	●	●	●	●
RAM-Mounts dummy, D-series	●	●	●	●	●	●	●	●	●	●	●
RAM-Mounts computer rack, C-series	●	●	●	●	●	●	●	●	●	●	●
RAM-Mounts scanner rack, C-series	●	●	●	●	●	●	●	●	●	●	●
Powder fire extinguisher	●	●	●	●	●	●	●	●	●	●	●
Narrow overhead guard for drive in racking	●	●	●	●	●	●	●	●	●	●	●
TYRES											
Solid pneumatic tyres	●	●	●	●	●	●	●	●	●	●	●
Solid non-marking tyres	●	●	●	●	●	●	●	●	●	●	●
ENVIRONMENT											
Hot area hydraulic oil, VG46	●	●	●	●	●	●	●	●	●	●	●
Cold area hydraulic oil, VG15	●	●	●	●	●	●	●	●	●	●	●
Hydraulic oil food grade	●	●	●	●	●	●	●	●	●	●	●
Bio grade oil	●	●	●	●	●	●	●	●	●	●	●
Cold store option, (to -35C)	●	●	●	●	●	●	●	●	●	●	●

FB14-20(C)N2(T) SERIES ELECTRIC COUNTERBALANCE

1.4 – 2.0 tonnes



LED working lights, 2 front and 1 rear.



Blue point and red line safety lights



Deluxe cabin

WHEN RELIABILITY IS EVERYTHING...

Like any product bearing the Logisnext Forklifts name, our materials handling equipment is backed by the engineering expertise, global resources, and continuous innovation of Logisnext — a leading group dedicated to materials handling and intralogistics.

Logisnext brings together advanced truck design, energy solutions, and connected technologies to help businesses move goods more safely, efficiently and reliably... day after day, year after year.

So when we promise you quality, reliability and value for money, you know it's a guarantee we can deliver.

That's why every model in our award winning and comprehensive range of lift trucks and warehouse equipment is built to a high specification — to ensure it keeps working for you. Whatever the job. Whatever the conditions.

You'll never work alone

As your local authorised distributor, we are here to keep your trucks working, through our extensive experience, our technical excellence, and our commitment to customer care.

We are your local experts, backed by the wider Logisnext Forklifts organisation and the connected support of the Logisnext group.

No matter where you are, help is close by.



EDiA
THE ELECTRIC DIAMOND



The EDiA name appears proudly on our award-winning range of electric forklift trucks.

Through the years EDiA's reputation for endurance and reliability has been likened to the quality and enduring value of a diamond.

© 2026 Logisnext Europe B.V. All rights reserved.

Specifications are indicative and may vary depending on operating conditions. Failure to assess all factors may result in performance deviations.

All relevant sales support materials and technical expertise of the official distributor must be considered when identifying the best product/solution. Options and technical details may change without notice. Full legal notice and up-to-date product information: logisnext-forklifts.eu

CESL2773 (09/26)

Logisnext Europe B.V.

Hospitaaldreef 29 (floor 13), 1315 RC Almere,
The Netherlands.

Tel +31 36 54 94 311

logisnext-forklifts.eu



lnf2.eu/youtube



lnf2.eu/facebook



lnf2.eu/linkedin

Logisnext
Forklifts 