

PRELIMINARY
SPECIFICATIONS

EDiA^{EX} FB25-35A(C)N Series

ELECTRIC COUNTERBALANCE

2.5 – 3.5 tonnes

CONTROL DRIVES CONFIDENCE... CONFIDENCE DRIVES WORK

Everything about EDiA EX inspires confidence. Our design team worked to build something that's robust yet nimble, technologically advanced yet completely intuitive to control. EDiA gives you confidence to do the job knowing it'll always be up to the task, every time. With four-wheel steering and impressive residual capacities you get big-truck performance that works in tight spaces. And AutoBoost means you'll never feel like you're lacking power.

SPECIFICATIONS

FB25AN
FB25ACN
FB30AN
FB30ACN
FB35AN

WHEN
RELIABILITY IS
EVERYTHING...



Logisnext
Forklifts 

EDiA ^{EX}

FB25-35A(C)N SERIES

ELECTRIC COUNTERBALANCE

2.5 – 3.5 tonnes



But it's not just about performance, it's about safety too. From the mast to the dashboard to the counterweight, every part has been refined to maximise the driver's all-round view of the task. No gimmicks, just great design. Smart systems work with the driver's capabilities and the current load to adjust the response to the current situation - for example, lifting and lowering is always smooth and steady thanks to the Adaptive Lift Control system.

For years our forklifts have been the operator's favourite. With a choice of intuitive control schemes options, different operator modes, a highly adjustable cabin, and countless other features, each operator can have the EDiA EX they want, with a setup that feels completely natural to them the second they sit in the cab. A perfectly tailored setup makes a shift more comfortable, more efficient, and more productive. It's all about inspiring confidence.

BRAKES

- **Sealed, wet-disc brakes**
Truck uses regenerative braking in normal driving, so mechanical brakes have a long life span and are virtually maintenance-free.
- **Automatic parking brake with hill hold**
The truck stops automatically when the accelerator is not engaged, preventing rolling on ramps. No need to remember to use a handle or switch.



- **Intelligent Cornering System**
The truck senses the angle of a turn and reduces speed early for maximum stability and accurate, positive cornering.

DRIVE

- **Sensitive Drive System (SDS)**
An intuitive driver-assist system for increased safety. Performance is managed according to steer angle and the velocity of foot and finger controls.
- **ECO mode**
This mode optimises energy efficiency and gives smoother performance. Ideal for long shifts, training, new users, and part-time users.
- **PRO mode**
This mode maximises performance parameters, giving full control to more experienced operators in intensive situations.
- **AutoBoost***
Acceleration and torque boost functions provide more power when needed, such as on ramps.
- **Electric differential lock***
When activated, both front wheels spin simultaneously, giving the truck better traction and control in slippery conditions.

ELECTRICAL AND CONTROL SYSTEMS

- **Straightforward component layout**
Fast, easy access to key areas, reducing downtime and cutting routine servicing bills.

- **Sealed connectors**
This reduces the need for maintenance and repair.
- **Sideways battery change**
Integrated sliding rollers offer quick and easy battery change for multi-shift operations. (Option)
- **Emergency switch**
Weather-protected emergency switch stops the truck.

FORKS AND MAST

- **Passive Sway Control**
Minimises mast sway, especially in high lifts above 3m.
- **Adaptive Lift Control***
Allows truck to remain stable with fewer movements when lowering loads from high heights.
- **Adjustable lifting and lowering setting**
Through the multi-functional configuration software TruckTool, the lifting and lowering functions can be adjusted.
- **Strong, high-visibility mast**
Free-lift cylinder structure is optimised with hoses over chains for outstanding visibility.



For more information on EDiA EX please visit our website



lnf2.eu/ediaex

EDiA ^{EX} FB25-35A(C)N SERIES ELECTRIC COUNTERBALANCE

2.5 – 3.5 tonnes



OPERATOR COMPARTMENT AND CONTROLS

- **Unparalleled 360° visibility**
An optimised mast, wheel, dashboard and counterweight design maximises visibility to load, forks, front and rear wheels - giving safe, confident operation in tight spaces.
- **F2 button**
This simple thumb control integrates additional key controls without taking your eyes off the load. Options include clamp release and automatic tilt centring.
- **Optimised pedal position**
All pedals are in the most ergonomic position, shaped and angled so each pedal will feel familiar to use and easy on the ankles.
- **Clear, informative display**
Full colour and easy to read from all angles, even in direct sunlight. Perfectly positioned for at-a-glance reference, without reducing all-round visibility.
- **Touch-sensitive fingertip controls**
Controls have a natural-feeling, spring-loaded response: press gently for finer control.
- **ErgoCentric adjustable armrest**
This allows for a natural hand position, minimising injury and fatigue. Can be easily adjusted with one hand.
- **Fully adjustable driving position**
Create the perfect seat, arm and steering wheel position for each operator's unique needs.
- **Plenty of storage space**
Storage for on-board essentials, putting clipboard, mobile phone, drinks bottle and pen all easily to hand.
- **Spacious, open cabin**
The room means that operators of various sizes can benefit from a range of comfortable driving positions.
- **Extra-large low step**
Entry and exit is easy and safe, thanks to a high-grip surface.
- **Dashboard bar**
Easy to attach options such as monitors without blocking main display.
- **Narrow inclined dashboard**
This enhances the driver's perception of surroundings - giving even greater visibility to the front and sides of the truck.
- **Four independently gliding windows**
Rear windows can glide to the front, this helps with situations such as accessing door controls while reversing.
- **Rear window**
Can be opened partially for ventilation or fully for emergency exit.
- **Low windshield wiper motor**
Operator has a good view from the middle of the mast.
- **Long handle bar**
Aids safer entry/exit.
- **Flat floor**
No obstructions and plenty of room for the operator.

- **Dual joysticks**
Dual joysticks offer simultaneous functions for lift and tilt, and settings can be customised to customer requirements. (Option)



For more information
on EDiA ^{EX} please
visit our website



lnf2.eu/ediaex

EDiA **EX**

FB25-35A(C)N SERIES

ELECTRIC COUNTERBALANCE

2.5 – 3.5 tonnes



HYDRAULICS

- **Precision tilt and side shift**
This provides easy, fine control - making difficult movements safer and faster.
- **Load sensing hydraulic system**
Load handling functions react similarly to different load weights.
- **Automatically optimised**
hydraulic control for higher lifts
Minimises jerky movements for smoother, safer operation.

FRAME AND BODY

- **Bright working lights**
Illuminate load and surroundings. Installed in mast structure, but do not light the structure or cabin to minimise reflections and increase visibility.
- **Easy charging latch**
Small latch on the side of the truck allows charging cable to be connected without opening the battery door. (Li-ion option only)

STEERING SYSTEM

- **Four Wheel Steering (4WS)**
Front axle drive motors turn in separate directions for better grip and precise handling. The rear axle steers through a full 100°, with dual drive motors for instant, smooth turning on the spot and no initial „push“. This offers excellent manoeuvrability in tight spaces.

- **Perfectly weighted steering**
Optimal steering wheel size with a light but firm feel gives confidence and manoeuvrability at all speeds.



For more information
on EDiA EX please
visit our website



lnf2.eu/ediaex



EDIA^{EX}

OPTIONAL LI-ION BATTERY SYSTEMS

MAKE YOUR FORKLIFT GO EVEN FURTHER



Lead-acid batteries have been the standard choice for electric lift trucks for decades, and for good reason — they work. But long charging times, demanding maintenance, the need for spare batteries, and the risk of operator misuse can turn day-to-day running into a drag on productivity.

Logisnext Li-ion changes that equation. We don't build one Li-ion battery and apply it to all situations. Whatever your operation looks like, from continuous multi-shift running to lighter, more occasional duty, there's a Logisnext Li-ion battery specified to match it, with a low-maintenance design that all but eliminates the cell damage caused by operator error.

Where a Li-ion option existed before, it typically came from a third-party battery supplier — with its own warranty, its own diagnostics, and its own service relationship running alongside the truck's. Logisnext Li-ion is different: a proprietary Li-ion power unit engineered specifically for Logisnext Forklifts, where the truck, the battery, the onboard battery management system and the charger are run on one diagnostic software, supported by one service technician, and covered by Logisnext warranties.



Li-ion battery option is available in selected regions.

Continuing improvement may lead to changes in these specifications

- **One warranty provider, one service tech**
Truck, battery, onboard battery management system, and charger are covered by a Logisnext warranties and diagnosed through one system — not separate suppliers with separate contracts to chase when something needs attention.
- **Gas-emission free and space-efficient operation**
No off-gassing means no dedicated ventilation or charging room, freeing up floor space you'd otherwise lose to lead-acid infrastructure.
- **Exceptional battery and charger efficiency**
State-of-the-art cell and charger technology delivers up to 30% more power efficiency than lead-acid batteries.
- **Maintenance-free design**
No daily checks, no water refills. Fewer manual touchpoints means less risk of operators damaging cells and shortening battery life.

Fully integrated with Logisnext Forklifts


CANbus communication and automatic ON/OFF synchronisation link battery and truck as one system. Battery level, notifications, and alarms all appear directly on the truck display, giving operators a clear, single point of reference.

- **No spare batteries or charging room needed**
Free up space and cut costs on multi-shift operations, without the extra batteries lead-acid fleets depend on.
- **Quick charge capability**
A 15-minute top-up during breaks or downtime keeps a truck running for longer, improving productivity.
- **Higher sustained voltage**
Consistent lifting and driving performance from the first hour of a shift to the last, with none of the power drop-off of lead-acid.
- **Multiple safety features**
Circuit protection, deep-discharge and overcharge protection, and individual cell temperature and voltage monitoring, all built in as standard.
- **Wide choice of battery and charger capacities.**
Power supply matched to the exact demands of your application, whatever the truck or the shift pattern.

Clean by design



With no emissions and no acid to manage, Logisnext Li-ion batteries suit sensitive environments: food production, packaging, and other spaces where cleanliness isn't optional.

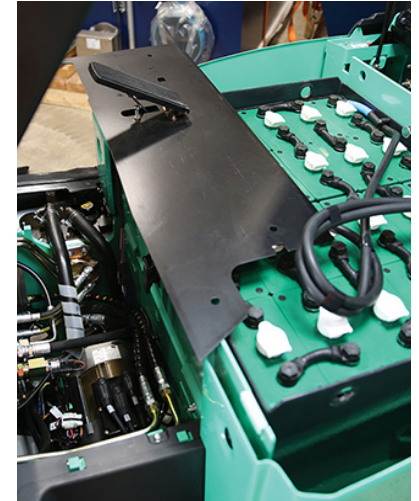

For more information on Li-ion please visit our website



lnf2.eu/lin

VDI - PERFORMANCE & DIMENSIONS

CHARACTERISTICS				Logisnext Forklifts				
1.1	Manufacturer (abbreviation)			FB25AN	FB25ACN	FB30AN	FB30ACN	FB35AN
1.2	Manufacturer's model designation			Electric	Electric	Electric	Electric	Electric
1.3	Power source: (battery, diesel, LP gas, petrol)			Seated	Seated	Seated	Seated	Seated
1.4	Operator type: pedestrian, (operator)-standing, -seated			2500	2500	3000	3000	3500
1.5	Load capacity	Q	kg	500	500	500	500	500
1.6	Load center distance	c	mm	476	476	504	504	504
1.8	Load distance, axle to fork face	x	mm	1730	1585	1730	1585	1730
1.9	Wheelbase	y	mm					
WEIGHT								
2.1	Truck weight, without load / including battery (simplex mast, lowest lift height)		kg	4737	4584	5230	5222	5654
2.2	Axle loading with maximum load, front / rear (simplex mast, lowest lift height)		kg	6301 / 937	6296 / 788	7348 / 882	7351 / 870	8183 / 971
2.3	Axle loading without load, front / rear (simplex mast, lowest lift height)		kg	2390 / 2347	2256 / 2328	2607 / 2623	2450 / 2771	2651 / 3002
WHEELS, DRIVE TRAIN								
3.1	Tyres: V=solid, L=pneumatic, SE=solid pneumatic - front / rear			SE	SE	SE	SE	SE
3.2	Tyre dimensions, front			23 × 9 - 10	23 × 9 - 10	23 × 10 - 12	23 × 10 - 12	23 × 10 - 12
3.3	Tyre dimensions, rear			18 × 7 - 8	18 × 7 - 8	18 × 7 - 8	18 × 7 - 8	18 × 7 - 8
3.5	Number of wheels, front / rear (x=driven)			2 x / 2	2 x / 2	2 x / 2	2 x / 2	2 x / 2
3.6	Truck width (center of tyres), front	b10	mm	985	985	950	950	950
3.7	Truck width (center of tyres), rear	b11	mm	970	970	970	970	970
DIMENSIONS								
4.1	Mast tilt, forwards / backwards	α/β	°	6 / 8	6 / 8	6 / 8	6 / 8	6 / 8
4.2	Height with mast lowered (see tables)	h1	mm	2145	2145	2165	2165	2291
4.3	Free lift (see tables)	h2	mm	100	100	100	100	100
4.4	Lift height (see tables)	h3	mm	3300	3300	3270	3270	3300
4.5	Overall height with mast raised	h4	mm	4355	4355	4325	4325	4345
4.7	Height to top of overhead guard	h6	mm	2240	2240	2240	2240	2240
4.8	Seat height	h7	mm	1130	1130	1130	1130	1130
4.12	Tow coupling height	h10	mm	395	395	395	395	395
4.19	Overall length	l1	mm	3600	3459	3628	3487	3628
4.20	Length to fork face (includes fork thickness)	l2	mm	2530	2389	2558	2417	2558
4.21	Overall width	b1/b2	mm	1190	1190	1190	1190	1190
4.22	Fork dimensions (thickness, width, length)	s / e / l	mm	40 × 100 × 1100	40 × 100 × 1100	45 × 120 × 1100	45 × 120 × 1100	45 × 120 × 1100
4.23	Fork carriage to DIN 15 173 A/B/no			2A	2A	3A	3A	3A
4.24	Fork carriage width	b3	mm	1000	1000	1000	1000	1000
4.31	Ground clearance under mast, with load	m1	mm	105	105	115	115	115
4.32	Ground clearance at center of wheelbase, with load (forks lowered)	m2	mm	122	122	122	122	122
4.33	Working aisle width with 1000 x 1200 mm pallets, crosswise	Ast	mm	3805	3660	3830	3690	3830
4.34a	Working aisle width with 800 x 1200 mm pallets, crosswise	Ast	mm	3749	3605	3773	3629	3773
4.34b	Working aisle width with 800 x 1200 mm pallets, lengthwise	Ast	mm	3960	3815	3985	3840	3985
4.35	Turning circle radius	Wa	mm	2064	1920	2064	1920	2064
4.36	Minimum distance between centers of rotation	b13	mm	160	160	160	160	160
PERFORMANCE								
5.1	Travel speed, with / without load		km/h	20 / 20	20 / 20	20 / 20	20 / 20	18 / 18
5.2	Lifting speed, with / without load		m/s	0.5 / 0.65	0.5 / 0.65	0.45 / 0.6	0.45 / 0.6	0.45 / 0.6
5.3	Lowering speed, with / without load		m/s	0.55 / 0.5	0.55 / 0.5	0.5 / 0.45	0.5 / 0.45	0.5 / 0.45
5.5	Rated drawbar pull, with / without load		N	9300 / 9700	9300 / 9700	9100 / 9550	9100 / 9550	8950 / 9500
5.6	Maximum drawbar pull, with / without load (5 min short duty)		N	15800 / 16200	15800 / 16200	15550 / 16050	15550 / 16050	15400 / 16000
5.7	Gradeability, with / without load		%	15 / 25	15 / 25	13 / 22	13 / 22	12 / 20
5.8	Maximum gradeability, with / without load		%	23 / 38	23 / 38	20 / 34	20 / 33	18 / 31
5.9	Acceleration time (10 metres) with / without load		s	4.1 / 3.8	4.1 / 3.8	4.2 / 3.8	4.2 / 3.8	4.4 / 3.8
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)			Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
ELECTRIC MOTORS								
6.1	Drive motor capacity (60 min. short duty)		kW	2 × 8	2 × 8	2 × 8	2 × 8	2 × 8
6.2	Lift motor output at 15% duty factor		kW	20.8	20.8	25.5	25.5	25.5
6.3	Battery to DIN 43 531 / 35 / 36 A/B/C/no			43536A	43536A	43536A	43536A	43536A
6.4	Battery voltage/capacity at 5-hour discharge		V/Ah	80 / 700-775	80 / 560-620	80 / 700-775	80 / 560-620	80 / 700-775
6.5	Battery weight		kg	1863	1558	1863	1558	1863
MISCELLANEOUS								
8.1	Type of drive control			AC	AC	AC	AC	AC
10.1	Maximum operating pressure for attachments			185	185	185	185	205
10.2	Oil flow for attachments		bar	30	30	30	30	30
10.7	Noise level, value at operator's ear (EN 12053)		l/min	65	65	66	66	66
10.8	Towing coupling design / DIN type, ref.		dB(A)	DIN 15170-H	DIN 15170-H	DIN 15170-H	DIN 15170-H	DIN 15170-H

EDIA EX



FB25-35A(C)N SERIES

ELECTRIC COUNTERBALANCE

2.5 - 3.5 tonnes



FB35AN

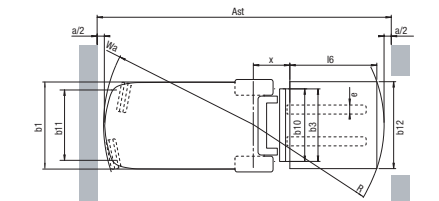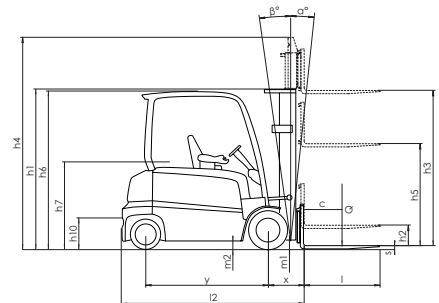

$Ast = Wa + R + a$
 Ast = Working aisle width with load
 Wa = Turning radius
 a = Safety clearance = 2×100 mm
 $R = \sqrt{(l6 + x)^2 + (b12 / 2 - b13)^2}$
 $b12$ = Pallet width (1200 mm)

MAST PERFORMANCE AND CAPACITY

EDIA ex

FB25-35(C)N SERIES

FB25AN / FB25ACN						FB25ACN		FB25AN	
MAST TYPE	h3 mm	h1 mm	h4 mm	h2 / h5** mm	tilt angle (fwd-rev)°	Q@ c=500 mm kg	Q@ c=600 mm kg	Q@ c=500 mm kg	Q@ c=600 mm kg
SIMPLEX	3000	1995*	4055	100	6 - 8	2500	2250	2500	2250
	3300	2145*	4355	100	6 - 8	2500	2250	2500	2250
	3740	2410	4795	100	6 - 8	2500	2250	2500	2250
	4100	2590	5155	100	6 - 8	2500	2250	2500	2250
	4500	2800	5555	100	6 - 8	2500	2250	2500	2250
	5000	3050	6055	100	6 - 8	2475	2250	2500	2250
	5500	3300	6555	100	6 - 4	2400	2225	2450	2250
DUPLEX	6000	3550	7055	100	6 - 4	2000	2000	2000	2000
	3000	1995*	4055	940	6 - 8	2500	2250	2500	2250
	3300	2145*	4355	1090	6 - 8	2500	2250	2500	2250
	3700	2410	4755	1355	6 - 8	2500	2250	2500	2250
TRIPLEX	4020	2590	5075	1535	6 - 8	2500	2250	2500	2250
	3730	1805*	4785	750	6 - 6	2500	2250	2500	2250
	4030	1905*	5085	850	6 - 6	2500	2250	2500	2250
	4300	1995*	5355	940	6 - 6	2500	2250	2500	2250
	4750	2145*	5805	1090	6 - 6	2500	2250	2500	2250
	5060	2265	6115	1210	6 - 6	2450	2250	2500	2250
	5500	2410	6555	1355	6 - 6	2350	2200	2500	2250
	5990	2590	7045	1535	6 - 4	2275	2075	2375	2225
	6500	2850	7555	1795	6 - 4	2075	2025	1925	1925
	7000	3050	8055	1995	6 - 4	1575	1575	1475	1475

* Lower than overhead guard. ** Without load back rest free lift height is increased by 395 mm.

FB35AN						FB35AN	
MAST TYPE	h3 mm	h1 mm	h4 mm	h2 / h5** mm	tilt angle (fwd-rev)°	Q@ c=500 mm kg	Q@ c=600 mm kg
SIMPLEX	3000	2170*	4045	100	6 - 8	3500	3150
	3300	2290	4345	100	6 - 8	3500	3150
	3720	2500	4765	100	6 - 8	3500	3150
	4000	2755	5045	100	6 - 8	3500	3150
	4500	3000	5545	100	6 - 8	3500	3150
	5000	3250	6045	100	6 - 8	3500	3150
	5500	3500	6545	100	6 - 4	3400	3150
DUPLEX	6000	3750	7045	100	6 - 4	2775	2775
	3010	2170*	4055	1125	6 - 8	3500	3150
	3300	2290	4345	1245	6 - 8	3500	3150
	3720	2615	4765	1570	6 - 8	3500	3150
TRIPLEX	4000	2755	5045	1710	6 - 8	3500	3150
	3730	1930*	4775	885	6 - 6	3500	3150
	4010	2050*	5055	1005	6 - 6	3500	3150
	4390	2170*	5435	1125	6 - 6	3500	3150
	4700	2290	5745	1245	6 - 6	3500	3150
	5030	2435	6075	1390	6 - 6	3450	3150
	5580	2615	6625	1570	6 - 6	3175	3075
	5990	2755	7045	1710	6 - 4	2875	2875
	6510	2930	7555	1885	6 - 4	2225	2225
	7000	3125	8045	2080	6 - 4	1675	1675

Continuing improvement may lead to changes in these specifications

FB30AN / FB30ACN						FB30ACN		FB30AN	
MAST TYPE	h3 mm	h1 mm	h4 mm	h2 / h5** mm	tilt angle (fwd-rev)°	Q@ c=500 mm kg	Q@ c=600 mm kg	Q@ c=500 mm kg	Q@ c=600 mm kg
SIMPLEX	3030	2045*	4085	100	6 - 8	3000	2700	3000	2700
	3270	2165*	4325	100	6 - 8	3000	2700	3000	2700
	3700	2430	4755	100	6 - 8	3000	2700	3000	2700
	4000	2610	5055	100	6 - 8	3000	2700	3000	2700
	4500	2870	5555	100	6 - 8	3000	2700	3000	2700
	5000	3120	6055	100	6 - 8	2900	2700	3000	2700
	5500	3370	6555	100	6 - 4	2800	2600	2925	2700
	6000	3635	7055	100	6 - 4	2675	2475	2625	2575
	3000	2035*	4055	980	6 - 8	3000	2700	3000	2700
DUPLEX	3250	2165*	4305	1110	6 - 8	3000	2700	3000	2700
	3700	2430	4755	1375	6 - 8	3000	2700	3000	2700
	4010	2610	5065	1555	6 - 8	3000	2700	3000	2700
	3690	1825*	4745	770	6 - 6	3000	2700	3000	2700
TRIPLEX	3990	1925*	5045	870	6 - 6	3000	2700	3000	2700
	4320	2045*	5375	990	6 - 6	3000	2700	3000	2700
	4700	2165*	5755	1110	6 - 6	2950	2700	3000	2700
	5060	2285	6115	1230	6 - 6	2875	2650	3000	2700
	5450	2430	6505	1375	6 - 6	2800	2600	2900	2700
	5970	2610	7025	1555	6 - 4	2625	2475	2725	2575
	6470	2870	7525	1815	6 - 4	1975	1975	2075	2075
	7000	3070	8055	2015	6 - 4	1425	1425	1575	1575

* Lower than overhead guard. ** Without load back rest free lift height is increased by 350 mm.

BATTERY DIMENSIONS		FB25AN	FB25ACN	FB30AN	FB30ACN	FB35AN
Battery voltage	V	80	80	80	80	80
Capacity at a 5-hour discharge	Ah	700-775	560-620	700-775	560-620	700-775
Battery weight, (+/-5%)	kg	1863	1558	1863	1558	1863
BATTERY BOX DIMENSIONS						
Length	mm	1028	1028	1028	1028	1028
Width	mm	855	711	855	711	855
Height	mm	784	784	784	784	784
BATTERY COMPARTMENT SIZE						
Length	mm	1056	1056	1056	1056	1056
Width	mm	865	720	865	720	865
Height	mm	790	790	790	790	790

* 5mm tolerance

* Lower than overhead guard.


** Without load back rest free lift height is increased by 240 mm.

SE tires, standard lifting carriage, 1000 - 1400 mm forks

h1 = Height with mast lowered
h2 = Standard free lift
h3 = Lift height
h4 = Height with mast raised
h5 = Full free lift
Q = Lifting capacity, rated load
c = Load centre (distance)

Capacities at various load centres

Simplex - h3 = 3300 mm

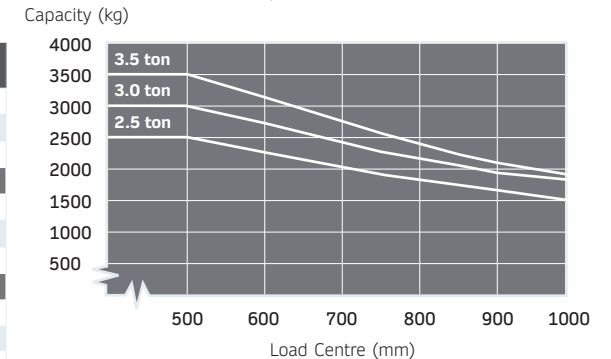

STANDARD EQUIPMENT & OPTIONS

- = Standard
- = Option

	FB25N	FB25CN	FB30N	FB30CN	FB35N
GENERAL					
4-wheel chassis, 80 volts, front wheel dual drive	●	●	●	●	●
Forks with a length of 1,070mm, equipped with load backrest	●	●	●	●	●
3-valve hydraulic fingertip control mounted on an ergonomic armrest	●	●	●	●	●
Key pre-set economy or high performance mode (ECO / PRO)	●	●	●	●	●
Battery compartment side door	●	●	●	●	●
Multifunctional interactive full colour display	●	●	●	●	●
Intelligent Cornering System	●	●	●	●	●
Tilttable steering column	●	●	●	●	●
TruckTool setup and diagnostics	●	●	●	●	●
PDS (Seat Switch Timeout = all functions are disabled, the truck will go into the stop mode, automatically applied parking brake)	●	●	●	●	●
Full-suspension vinyl Grammer MSG65 seat	●	●	●	●	●
CE name plates -language markings	●	●	●	●	●
Operations and Maintenance Manual	●	●	●	●	●
DIN battery connectors on frame	●	●	●	●	●
Battery door detection sensor	●	●	●	●	●
Fingertip control armrest	●	●	●	●	●
Manual control levers	■	■	■	■	■
Dual Joystick	■	■	■	■	■
POWER SOURCE					
Integrated Li-ion battery*	■	■	■	■	■
Lead acid battery	■	■	■	■	■
FRAME					
Battery sideway exchange chassis	■	■	■	■	■
Roller bed, chassis integrated (for battery SWE)	■	■	■	■	■
Battery tray (for roller guided battery SWE)	■	■	■	■	■
Battery sideway exchange tool**	■	■	■	■	■
Li-ion battery easy charging	■	■	■	■	■
T-bar battery stand	■	■	■	■	■
LIGHTING					
LED work lights (2 at the front and 1 at the rear)	●	●	●	●	●
Automated reversing light	●	●	●	●	●
Auto light switch	■	■	■	■	■
Amber strobe	■	■	■	■	■
Amber strobe mounted low	■	■	■	■	■
"Blue point" rear light	■	■	■	■	■
"Blue point" rear light mounted low	■	■	■	■	■
ELECTRICAL SYSTEM					
Smart backup alarm	■	■	■	■	■
Current output	■	■	■	■	■
12V connector	■	■	■	■	■
Operator presence pedal	■	■	■	■	■
Electronic differential lock	■	■	■	■	■
Dual pedal layout	■	■	■	■	■
Drive direction selection switch on ergonomic armrest (Forward-Backward). Only on FC controls	●	●	●	●	●
Drive direction lever in steering column (Forward-Neutral-Reverse)	■	■	■	■	■
Road light kit	■	■	■	■	■
PIN code access with start switch	■	■	■	■	■
Automated lift controls	●	●	●	●	●
Automatic tilt centering via the F2 button with FC TILT/C	■	■	■	■	■
Load weight indicator	●	●	●	●	●


* Li-ion battery option is available in selected regions.

** Backwards compatible with the EDiA family

Continuing improvement may lead to changes in these specifications

EDiA^{EX} FB25-35A(C)N SERIES ELECTRIC COUNTERBALANCE

2.5 - 3.5 tonnes



Front wheel dual drive



Cabin (Optional)



Cabin (Optional)

STANDARD EQUIPMENT & OPTIONS

● = Standard
■ = Option

	FB25N	FB25CN	FB30N	FB30CN	FB35N
OPERATOR'S CABIN					
Grammer MSG65 seat	●	●	●	●	●
Grammer MSG65 with heater	■	■	■	■	■
Grammer MSG65 with cloth upholstery	■	■	■	■	■
Grammer MSG65 with cloth upholstery and heater	■	■	■	■	■
Grammer MSG75	■	■	■	■	■
Grammer MSG75 with heater	■	■	■	■	■
Grammer MSG75 with cloth upholstery	■	■	■	■	■
Grammer MSG75 with cloth upholstery and heater	■	■	■	■	■
Backrest extension	■	■	■	■	■
ACCESSORIES					
Rear view mirror	■	■	■	■	■
External rear view mirror	■	■	■	■	■
Dead angle mirror	■	■	■	■	■
Wide view mirror	■	■	■	■	■
A4 size paper holder	■	■	■	■	■
Accessory clamp	■	■	■	■	■
Fire extinguisher	■	■	■	■	■
CABIN					
Steel doors, available in combination with options REAR and FR+TP	●	●	●	●	●
PVC doors, available in combination with options REAR and FR+TP	■	■	■	■	■
Sun visor, available in combination with option FR+TP	■	■	■	■	■
Interior package, available in combination with REAR and door	■	■	■	■	■
Heater, available in combination with REAR and steel doors, 2000 W	■	■	■	■	■
Safety doors	■	■	■	■	■
Container design. This option is available only with sideway battery exchange option SWE.	■	■	■	■	■
Delux cabin	■	■	■	■	■
EXTERIOR					
Special colour (RAL) for the frame and counterweight	■	■	■	■	■
FORKS & CARRIAGE					
Various fork lengths (920 - 1970mm), widths (100/120mm) and thicknesses (40/45mm), fork deletion	■	■	■	■	■
Side shifter W1000mm	■	■	■	■	■
Integrated side shifter W1000mm	■	■	■	■	■
Fork positioner+ integrated side shifter	■	■	■	■	■
Load backrest	●	●	●	●	●
HYDRAULIC SYSTEM					
3/4/5-way valve armrest-mounted fingertip control	■	■	■	■	■
3/4-way valve manual control	■	■	■	■	■
Adaptive Lift Control	■	■	■	■	■
Double action FC 3 v, for clamp usage	■	■	■	■	■
Double action FC 4 v, for clamp usage	■	■	■	■	■
Double action MC 3 v, for clamp usage	■	■	■	■	■
Double action MC 4 v, for clamp usage	■	■	■	■	■
Hydraulic accumulator	■	■	■	■	■
Adjustable hydraulic pressure (for 3rd and 4th valve)	■	■	■	■	■
Food grade hydraulic oil	■	■	■	■	■
Biodegradable hydraulic oil	■	■	■	■	■
Cold area hydraulic oil VG15	■	■	■	■	■
Hot area hydraulic oil VG46	■	■	■	■	■
3-way piping	■	■	■	■	■
4-way piping	■	■	■	■	■
TYRES					
Solid Pneumatic Tyres	●	●	●	●	●
Pneumatic Tyres	■	■	-	-	-
Non-marking Solid Tyres	■	■	-	-	-
Non-marking Cushion tyres	■	■	■	■	■
Cushion tyres	■	■	■	■	■
Solid Pneumatic Twin Tyres	■	■	■	■	■
Wide Stance drive wheels	■	■	■	■	■

EDIA^{EX} FB25-35A(C)N SERIES ELECTRIC COUNTERBALANCE


2.5 - 3.5 tonnes



Fingertip control armrest



Manual control levers



Dual Joystick

WHEN RELIABILITY IS EVERYTHING...

Like any product bearing the Logisnext Forklifts name, our materials handling equipment is backed by the engineering expertise, global resources, and continuous innovation of Logisnext — a leading group dedicated to materials handling and intralogistics.

Logisnext brings together advanced truck design, energy solutions, and connected technologies to help businesses move goods more safely, efficiently and reliably... day after day, year after year.

So when we promise you quality, reliability and value for money, you know it's a guarantee we can deliver.

That's why every model in our award winning and comprehensive range of lift trucks and warehouse equipment is built to a high specification — to ensure it keeps working for you. Whatever the job. Whatever the conditions.

You'll never work alone

As your local authorised distributor, we are here to keep your trucks working, through our extensive experience, our technical excellence, and our commitment to customer care.

We are your local experts, backed by the wider Logisnext Forklifts organisation and the connected support of the Logisnext group.

No matter where you are, help is close by.



EDIA THE ELECTRIC DIAMOND



The EDIA name appears proudly on our award-winning range of electric forklift trucks.

Through the years EDIA's reputation for endurance and reliability has been likened to the quality and enduring value of a diamond.

© 2026 Logisnext Europe B.V. All rights reserved.

Specifications are indicative and may vary depending on operating conditions. Failure to assess all factors may result in performance deviations.

All relevant sales support materials and technical expertise of the official distributor must be considered when identifying the best product/solution. Options and technical details may change without notice. Full legal notice and up-to-date product information: logisnext-forklifts.eu

CESL2774 (09/26)

Logisnext Europe B.V.

Hospitaaldreef 29 (floor 13), 1315 RC Almere,
The Netherlands.

Tel +31 36 54 94 311

logisnext-forklifts.eu



lnf2.eu/youtube



lnf2.eu/facebook



lnf2.eu/linkedin

