

ELECTRIC SCISSOR HIGHLIFTER

EXT 10



1000 kg



800 mm



304
Stainless
Steel

- Hygienic innovative design and compact
- Aggressive environments resistant chassis
- Ergonomic box handling table
- Comfortable electric lifting
- IP65 Electronic protected

The electric scissor highlifter manufactured by Inoxtruck offers an innovative design to improve the ergonomics in the handle of loads that produces in the process of pallet entry and exit of goods, apart from goods transport. In this way, the load keeps always to the suitable height to collect/deposit the loads, reducing the effort.

The hygienic design make the electric highlifter an ideal tool for the aggressive working conditions of the agrofood sector, thanks to the integral cleaning of the electric highlifter that reduces the risk of microbiological pollution.




Watch video



Hygienic Innovative Design

Totally opened chassis, waterproof compartment for lifting system and the operators drives and controls with lift and high IP protections, ensures a hygienic design, disappearing folds that provide together with continuous welding keeping the equipment in working order. All electronic equipment protection in a waterproof compartment.

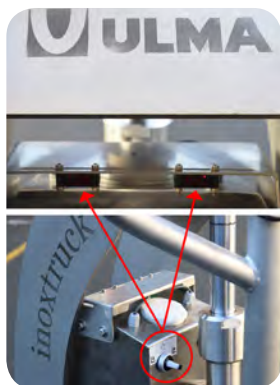

Ergonomic and Efficiency

The ergonomic tiller arm allows the operator an easy handling of the equipment, reducing the effort in the goods lifting and transport.



100% Stainless

All the parts including the hydraulic system have been manufactured in stainless steel.



Minimum Maintenance

All bearing are waterproof and self lubricated. All moveable parts are provided by polymeric bearings, free of lubrication. The waterproof battery that is included in this equipment is maintenance free.

Options

Remote control allows the lifting and lowering the forks without moving on to the tiller. Automatic height adjustment.

| Characteristics | | | | |
|------------------------|---|-----|----------------|---------------------|
| 1.1 | Manufacturer (Abreviation) | | ULMA Inoxtruck | ULMA Inoxtruck |
| 1.2 | Manufacturer's model designation | | EXT 10 | EXT 10 AC |
| 1.3 | Power source: battery, diesel, LP gas, petrol | | Battery | 1 PH 230V 50 Hz |
| 1.4 | Operator type: pedestrian, operator standing, seated | | Manual | Manual |
| 1.5 | Load capacity | Q | kg | 1000 |
| 1.6 | Load center distance | C | mm | 600 |
| 1.8 | Load wheel axle to fork face (forks lowered) | X | mm | 1000 |
| 1.9 | Wheelbase | Y | m | 1390 |
| 1.10 | Chassis | | AISI 304L | AISI 304L |
| 1.11 | Sheet | | AISI 304L | AISI 304L |
| Weight | | | | |
| 2.1 | Truck weight with nominal load & maximum battery weight | | kg | 1169 |
| 2.2 | Axle loading with nominal load & maximum battery weight, drive/load side | | kg | 379/790 |
| 2.3 | Axle loading without load & with maximum battery weight, drive/load side | | kg | 117/52 |
| Wheels and Drive Train | | | | |
| 3.1 | Tyres: P=Polyurethane, PA=Polyamide (nylon), Vul=Vulkollan, drive/load side | | PA/PA | PA/PA |
| 3.2 | Tyre dimensions, drive side | | 200 X 50 | 200 X 50 |
| 3.3 | Tyre dimensions, load side | | 80 X 67 | 80 X 67 |
| 3.5 | Number of wheels, drive/load side (x=driven) | | 2/2 | 2/2 |
| 3.6 | Track width (center of tyres), drive side | b10 | mm | 170 |
| 3.7 | Track width (center of tyres), load side | b11 | mm | 420 |
| Dimensions | | | | |
| 4.9 | Height of tiller arm (minimum/maximum) | h14 | mm | 1190 |
| 4.14 | Platform maximum height, raised | h12 | mm | 800 |
| 4.15 | Fork height, fully lowered | h13 | mm | 90 |
| 4.19 | Overall length | l1 | mm | 1805 |
| 4.20 | Length to fork face (includes fork thickness) | l2 | mm | 605 |
| 4.22 | Fork dimensions (thickness, width, length) | | mm | 65/162/1200 |
| 4.25 | Outside width over forks (minimum/maximum) | b5 | mm | 540 |
| 4.32 | Ground clearance at center of wheelbase (forks lowered) | m2 | mm | 15 |
| 4.33 | Working aisle width (Ast) with 800 x 1200mm pallets, load lengthwise | Ast | mm | 2250 |
| 4.35 | Turning circle radius | Wa | mm | 1600 |
| Performance | | | | |
| 5.2 | Lifting speed without/with load | | m/s | 0'07-0'06/0'06-0'05 |
| 5.3 | Lowering speed with/without load | | m/s | 0'06-0'05/0'07-0'06 |
| | Cycles without load, 0 kg. | | | 200 |
| | Cycles with load, 500 kg. | | | 100 |
| Electric Motor | | | | |
| 6.2 | Lift motor output at 15% duty factor | | kW | 0,8 |
| 6.4 | Battery voltage/capacity C5 | | V/Ah | 12/40 |
| 6.5 | Battery weight | | kg | 17 |

ULMA Inoxtruck's products are constantly improving. Because of this reason, some materials, options and specifications can be changed without previous notification.

OPTIONS:

- Lithium Ion Battery
- Remote control
- Remote control by foot pedal
- Automatic height adjustment
- Main power line supply 230V
- Stainless steel AISI 316L
- Parking brake on driving wheel

